


X-SMART 215



Dewatering Pump

60 Hz

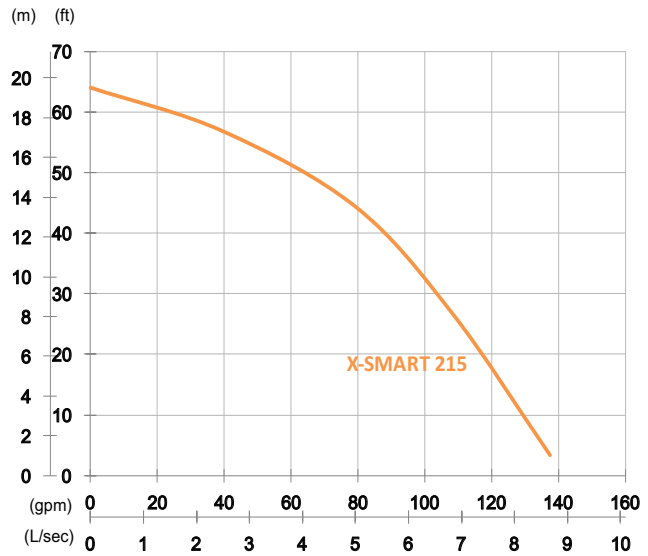

Shaft Speed : 3450 rpm

Outlet : 50mm, 2in

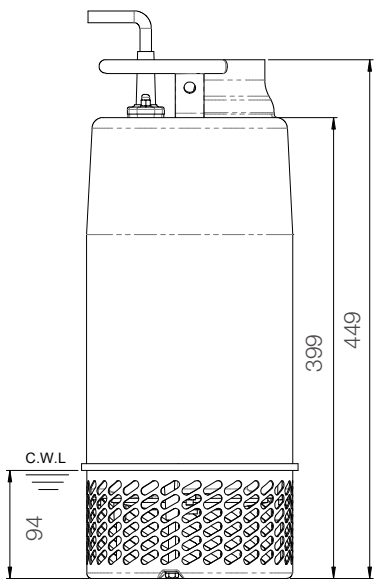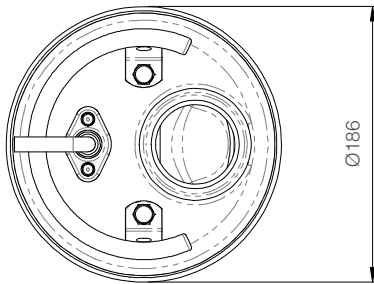

unit : mm

Weight : 19kg / 42 lbs

OUTPUT	HEAD	FLOW
1.5 kW	Rated : 13.5m, 44ft	Rated : 5 L/s, 79 gpm
2 HP	Max : 19.5m, 64ft	Max : 8.7 L/s, 137 gpm

Solid Passage : 7mm, 0.3in

Pump Type		Electric Submersible Pumps
		1-Phase, 110V or 220V
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter	1-Phase · Capacitor-Run
Lubricant		Food Grade (ISO VG32)
Impeller Type		Closed
Shaft Seal		Double Mechanical Seal
		Silicon Carbide VS Ceramic / Carbon
Bearings		C3 Shielded ball bearings
Cable		PVC (CSA Certified) / H07RN-F
		10m (33ft) or longer upon request.
Materials	Pump Casing	Stainless Steel
	Impeller	Stainless Steel
	Motor Frame	Stainless Steel
	Motor Shaft	Stainless Steel
	Strainer	Stainless Steel
Max. Liquid Temperature		40°C (104°F)
Max. Submersion Depth		20m (66ft)
pH Range		pH 5 - pH 8