



Technical Data **Peripheral Pump - GO-125**

Revision no.

Page:

1

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address




Brand: Gol Pumps

Model: GO-125

Weight (lb)

28.7

Dimensions:

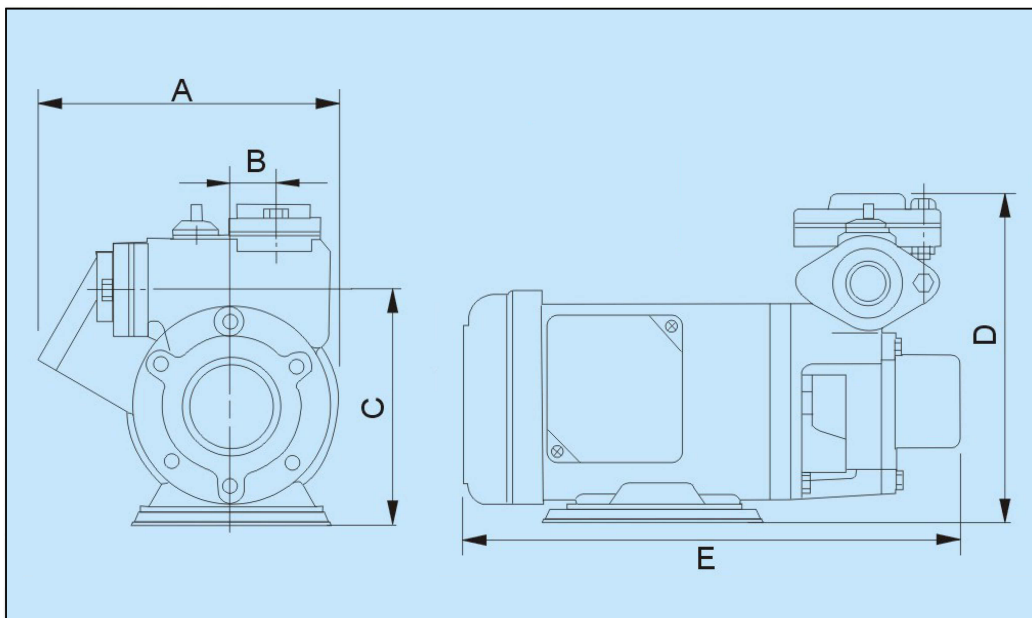

Flange (inch)

Inlet Outlet

1 1

Pump Installation Size (inch)

A B C D E

9.1 1.1 7.2 9.3 12.3

Project

Project ID

Created by

Created on

Last update



Performance Curves

Peripheral Pump - GO-125

Revision no.

Page:


2

Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

Model	Voltage	Phase	Power		Discharge Diam.	Max. Head	Max. Flow	
	v	ph	hp	kw	in	ft	m ³ /min	gpm
GO-125	115	1	1	0.75	1	147.6	0.08	21.1

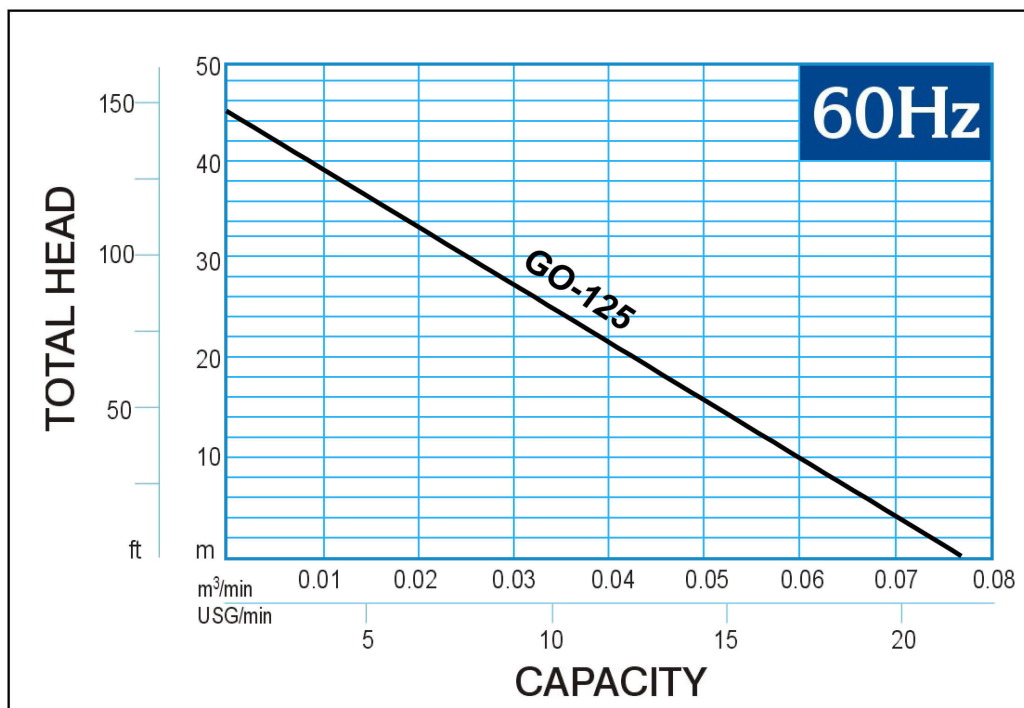

Parts List:

	NO.	NAME OF PARTS	MATERIAL	NO.	NAME OF PARTS	MATERIAL
	3	Motor Head Cover	Plastic (1/4, 1/2HP) Aluminum (1HP)	16	Flange Setter	Cast Iron
	4	Capacitor		17	Motor Lower Cover	Cast Iron
	7A	Upper Bearing		20	Pump Casing	Cast Iron
	7B	Lower Bearing		21	Impeller	Bronze
	9	Coil		30	Cooling Fan	Plastic
	10	Shaft	S45C	31	Fan Cover	Plastic
	11	Rotor	Steel Plate	33	Pump Protector	
	12	Stator	Steel Plate	34	Switch Cover	Plastic
	13	Motor Casing	SPC	45	Terminal Box Cover	Plastic
	15	Mechanical Seal	Ceramic Carbon	72	Outlet Rubber	NBR
				90	Motor Base	Plastic (1 HP)

Project

Project ID

Created by

Created on

Last update



Installation Peripheral Pump - GO-125

Revision no.

Page:

3


Receiver

From

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

"GO" REQUIRE A WATER TANK

Note: Level ball is not necessary.

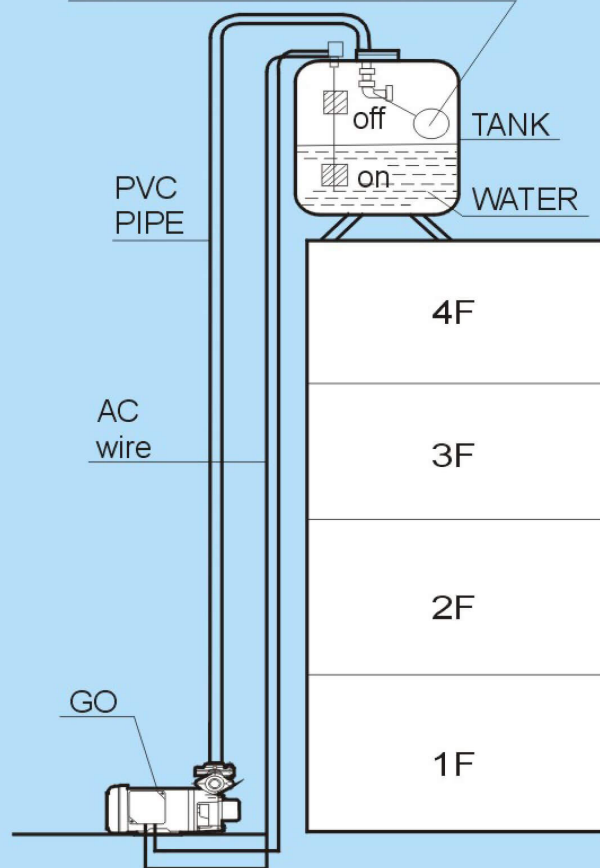

- Pump's on-off is controlled by the on-off level-switch equipped in the water tank.

Project

Project ID

Created by

Created on

Last update