

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Close Coupled Pump JM
NEMA Premium Efficiency Three-Phase
Product code : 12598689
Catalog # : 00336ET3E182JM-W22

Frame	: 182/4JM	Locked rotor time	: 46s (cold) 26s (hot)
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 7.52/3.76 A	Protection degree	: IP55
L. R. Amperes	: 64.7/32.3 A	Cooling method	: IC411 - TEFC
LRC	: 8.6x(Code K)	Mounting	: F-1
No load current	: 3.20/1.60 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3515 rpm	Noise level ²	: 66.0 dB(A)
Slip	: 2.36 %	Starting method	: Direct On Line
Rated torque	: 4.48 ft.lb	Approx. weight ³	: 77.6 lb
Locked rotor torque	: 250 %		
Breakdown torque	: 380 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.1889 sq.ft.lb		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads
Efficiency (%)	81.1	82.0	86.0	86.5	Max. traction : 75 lb
Power Factor	0.44	0.70	0.80	0.85	Max. compression : 153 lb

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
14.6	10.7	9.4	8.3	4.5	3.1	1.8

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6307 ZZ	6206 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	



Notes
USABLE @208V 8.01A SF 1.15 SFA 9.21A

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 1 Revision		
Checked by				
Date	11/03/2025			

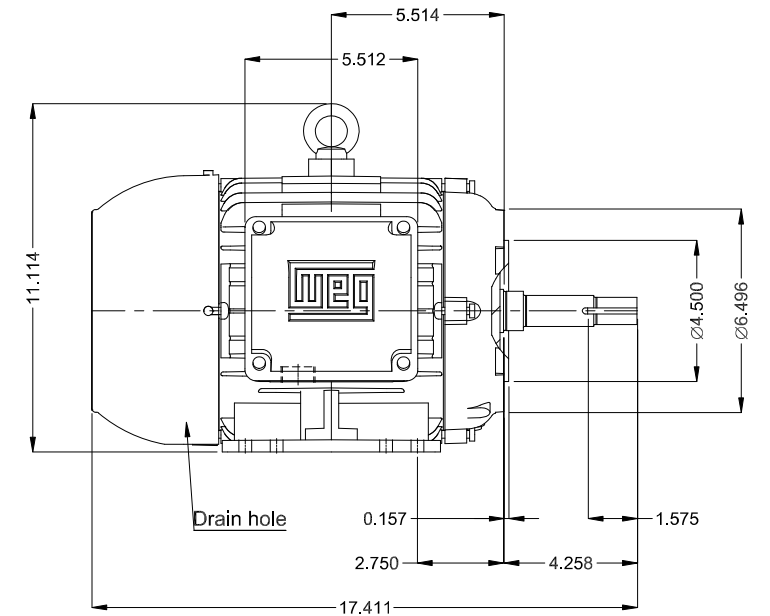

MADE IN MEXICO
12598689



MODEL 00336ET3E182JM-W22

Inverter Duty Motor
Severe Duty





Class I, Div 2, Gr A, B, C, D, 1.15SF - T3
Class II, Div 2, IIC, 1.15SF - T3
Class II, Div 2, Gr F, G - T5
60Hz: For use on PWM: Gr. A, B, C, D, F,
G, VT 1000:1, CT 20:1, 1.00SF - T4A



FOR SAFE AREA
Mod.TE1BFOXON
CC029A

PH3 60Hz Fr. 182/4JM 1000m.a.s.l. IP55 TEFC 80lb
V 230/460 A 7.52/3.76
HP 3.0 kW 2.2
SF 1.25 SFA 9.40/4.70
RPM 3515 PF 0.85
AMB 40°C INS cl. F DT80K NEMA NOM EFF 86.5%
DUTY CONT. DES B Code K

3.0HP 2.2kW 50Hz 380V 4.44A 2890RPM SF 1.25 SFA 5.55 EFF 85.5% (IE2)



MOBIL POLYREX EM

