

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : WEG ELECTRIC CORPORATION - WEC

Product line : W22

Frame	: 80	Locked rotor time	: 9 s (hot) 16 s (cold)
Output	: 0.75 kW	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230 V	Altitude	: 3280 ft
Rated current	: 5.22 A	Protection degree	: IP55
L. R. Amperes	: 36.5 A	Cooling method	: IC411 - TEFC
LRC	: 7.0	Mounting	: B35L(D)
No load current	: 2.80 A	Rotation ¹	: Both
Rated speed	: 3520 rpm	Noise level ²	: 65.0 dB(A)
Slip	: 2.22 %	Vibration class	: NOT APPLICABLE
Rated torque	: 1.50 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 230 %	Coupling	: Direct
Pull up torque	: 195 %	Approx. weight ³	: 38.0 lb
Breakdown torque	: 270 %	Painting plan	: 207A
Insulation class	: F	Color	: RAL 5009
Service factor	: 1.15		
Moment of inertia (J)	: 0.0214 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	60.0	68.0	71.0
Power Factor	0.75	0.83	0.88

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type	6204-ZZ	6203-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	: -
Max. compression	: -

Notes

Standards

Specification : IEC 60034-1
Test : IEC 60034-2
Noise : IEC 60034-9


Vibration : IEC 60034-14
Tolerance : IEC 60034-1

This revision replaces and cancel the previous one, which must be eliminated.


- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	kmello			1383074542	
Checked by	AUTOMATICO			Page	Rev.
Date	18/05/2023			1 / 1	0

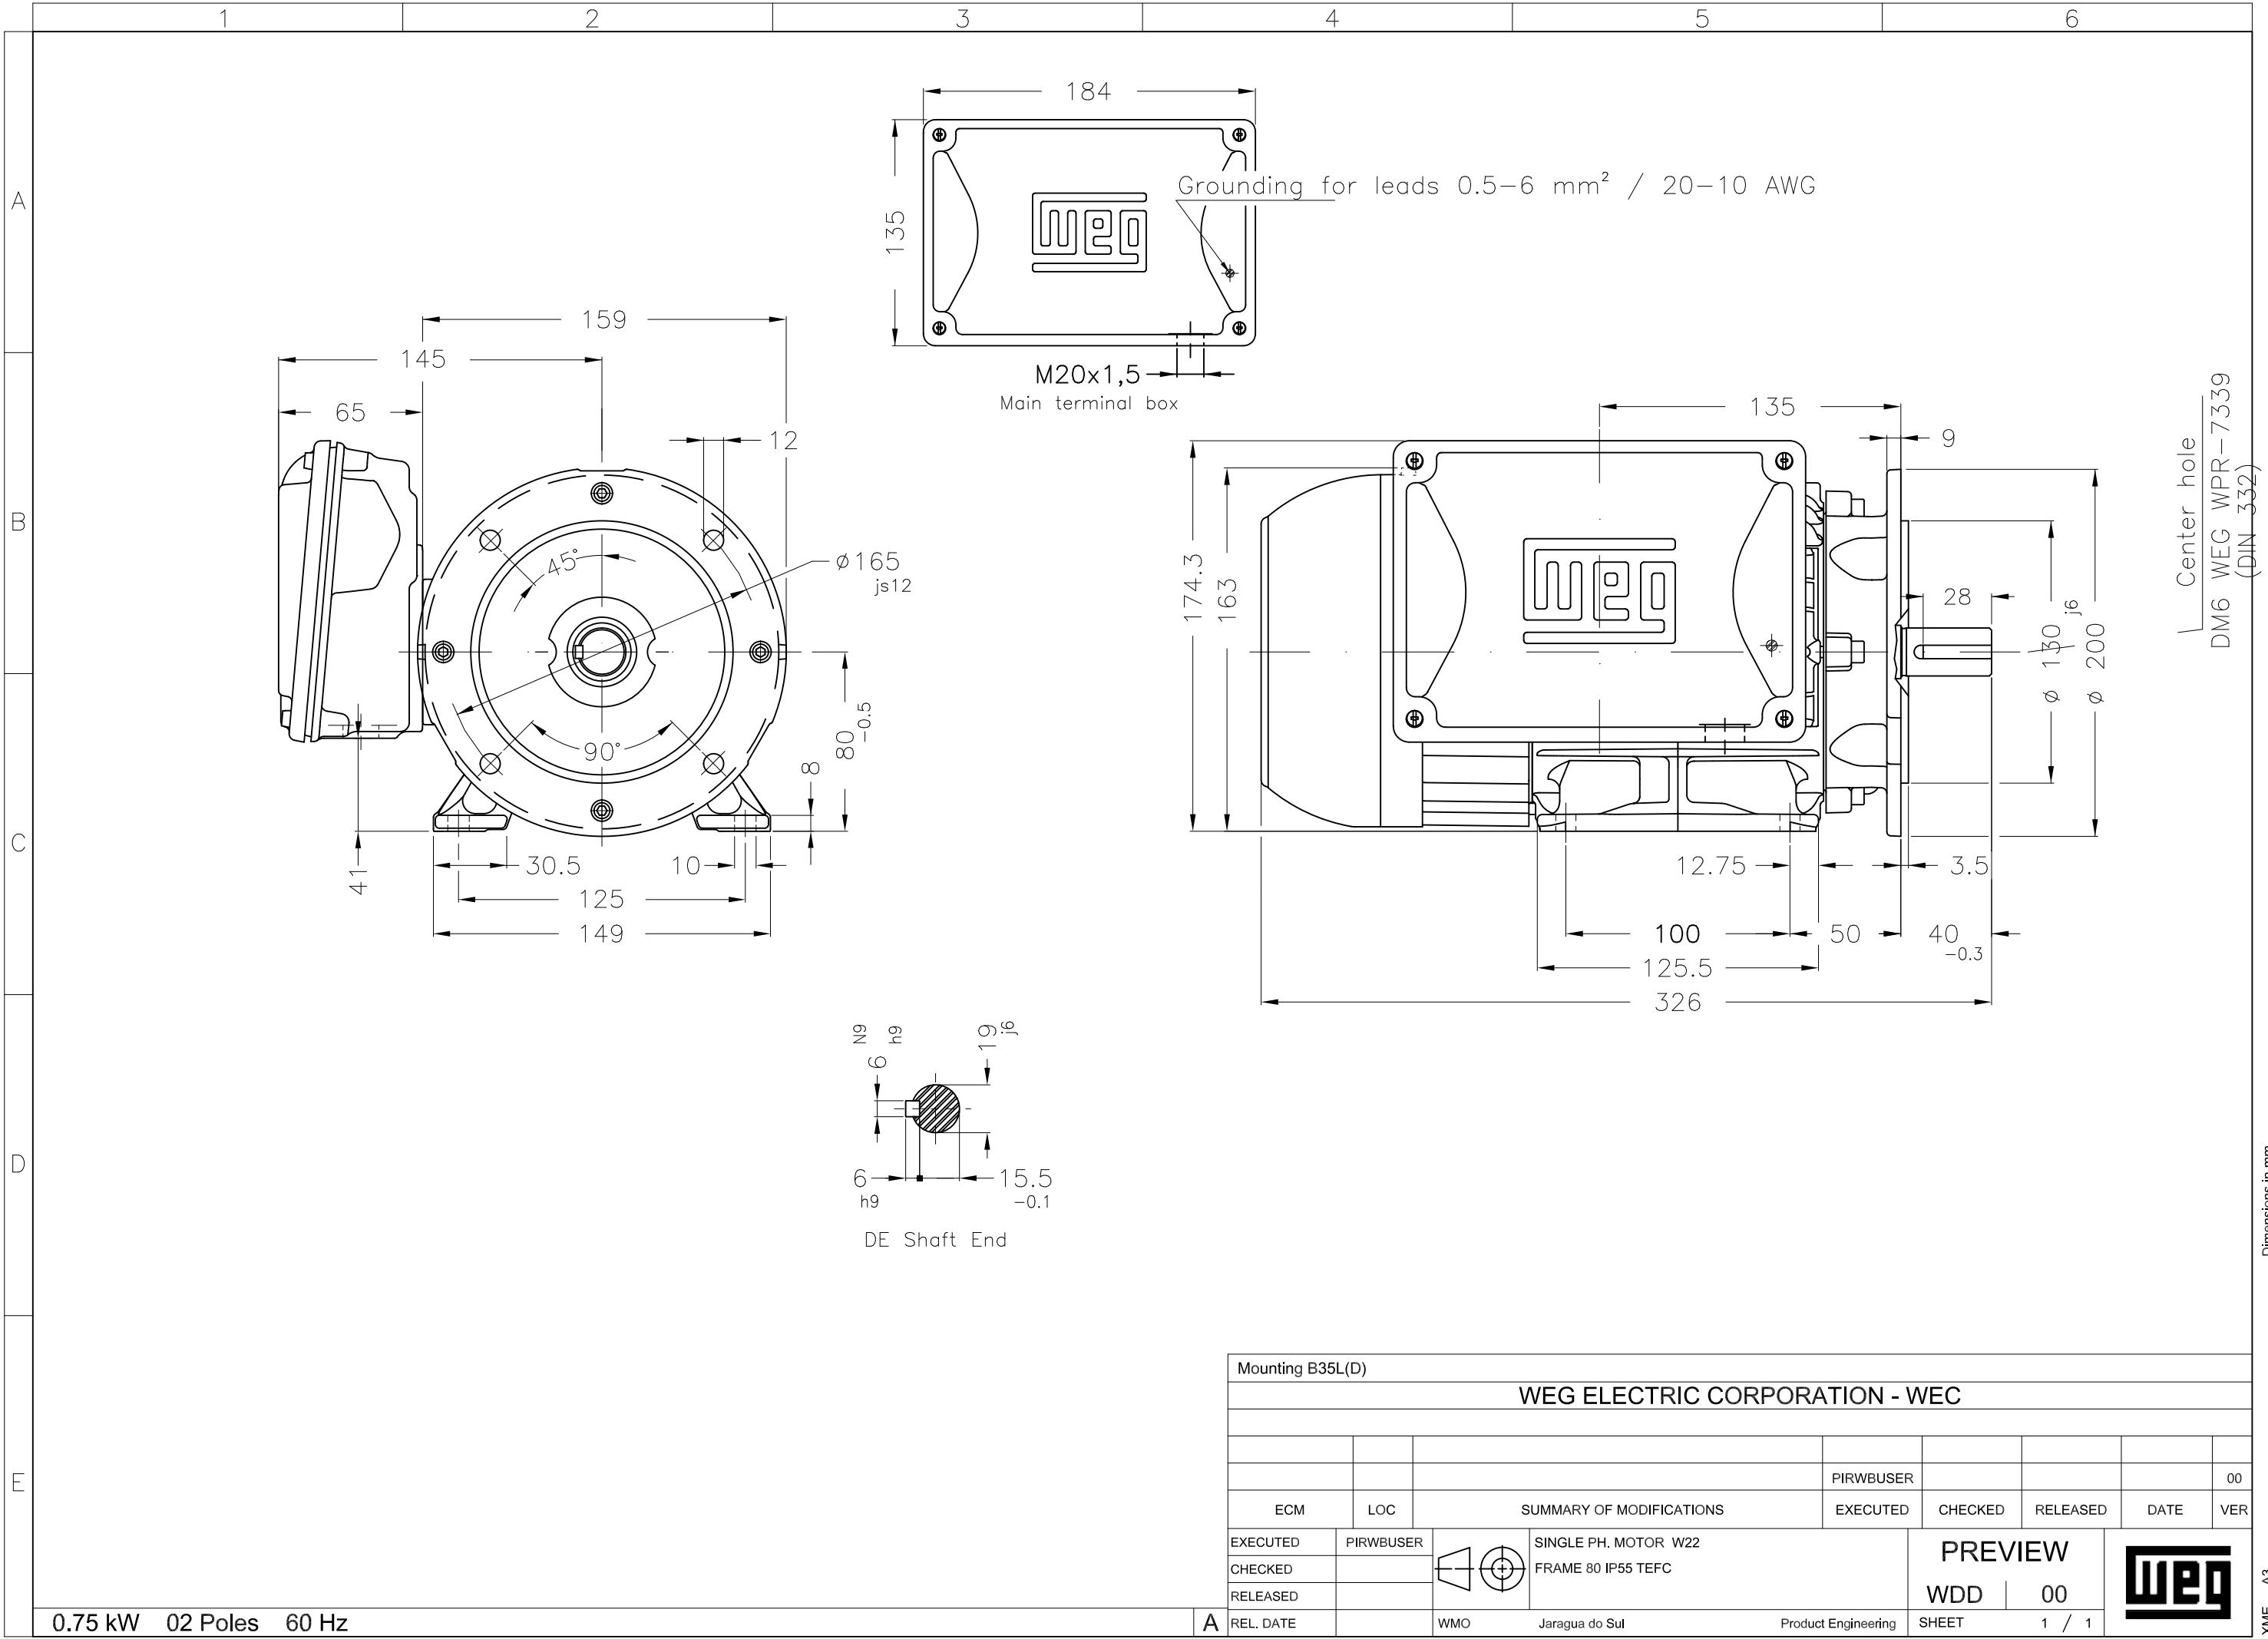

0.75 kW 02 Poles 60 Hz

Mounting B35L(D)									
WEG ELECTRIC CORPORATION - WEC									
				PIRWBUSER					00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER		SINGLE PH. MOTOR W22 FRAME 80 IP55 TEFC			PREVIEW			
CHECKED						WDD	00		
RELEASED									
A	REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1		