

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
Tel: (502) 778-2731 • 1 (800) 928-PUMP


Visit our website:
zoellerpumps.com

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

TECHNICAL DATA SHEET
PREMIUM SERIES MIGHTY-MATE
Cast Iron Model 95
Submersible Sump / Dewatering Pumps

PRODUCT SPECIFICATIONS

MOTOR	Horse Power	1/2
	Voltage	115
	Phase	1 Ph
	Hertz	60 Hz
	RPM	3450
	Type	Permanent split capacitor
	Insulation	Class B
	Amps	10.5
PUMP	Operation	Automatic
	Auto On/Off Points	9-1/2" (24 cm) / 2-1/2" (6.4 cm)
	Discharge Size	1-1/2" NPT
	Solids Handling	1/2" (12 mm) spherical solids
	Cord Length	15' (4.6 m)
	Cord Type	UL listed, 3-wire, grounded plug
	Max. Head	26' (7.9 m)
	Max. Flow Rate	80 GPM (303 LPM)
	Max. Operating Temp.	130 °F (54 °C)
	Cooling	Oil filled
	Motor Protection	Auto reset thermal overload
MATERIALS	Cap	Cast iron
	Motor Housing	Cast iron
	Pump Housing	Cast iron
	Base	Cast iron
	Upper Bearing	Sleeve bearing
	Lower Bearing	Ball bearing
	Mechanical Seals	Carbon and ceramic
	Impeller Type	Non-clogging vortex
	Impeller	Engineered thermoplastic
	Hardware	Stainless steel
	Motor Shaft	AISI 1215 cold rolled steel
	Gasket	Neoprene

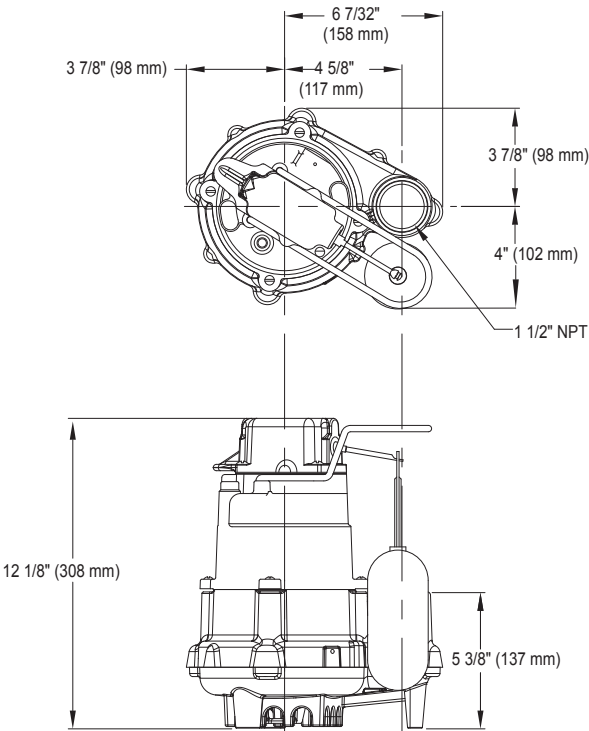

SK3129


NOTE: See model comparison chart for specific details.

Made In The USA.
Using a majority of U.S. content.



TOTAL DYNAMIC HEAD FLOW PER MINUTE

MODEL		95	
Feet	Meters	Gal.	Liters
5	1.5	80	303
10	3.0	68	257
15	4.6	50	189
20	6.1	28	106
25	7.6	5	19
Shut-off Head:		26.0 ft (7.9 m)	

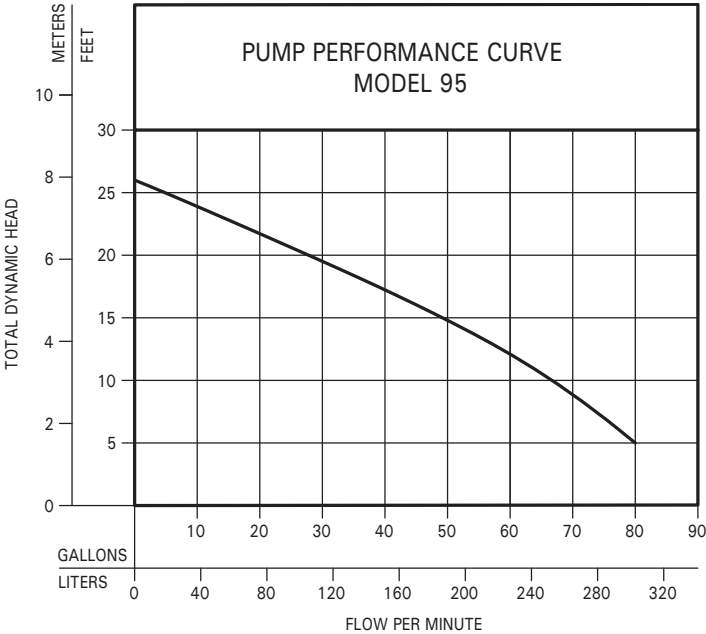

154422

Model	MODEL COMPARISON											CERTIFICATIONS
	Seal	Mode	Volts	Ph	Amps	HP	Hz	Lbs	Kg	Simplex	Duplex	cCSAus
M95	Single	Auto	115	1	10.5	1/2	60	38	17	1	---	Y

* Single piggyback switch included.

SPECIAL MODEL FEATURES

- This unit is equipped with Zoeller LED Plug that shows power to the pump.
- Has a cast iron switch case, motor and pump housing, base, and a thermoplastic impeller.
- Optional pump stand (P/N 10-2421). Integral float-operated electro-mechanical switch, no external control required.



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).