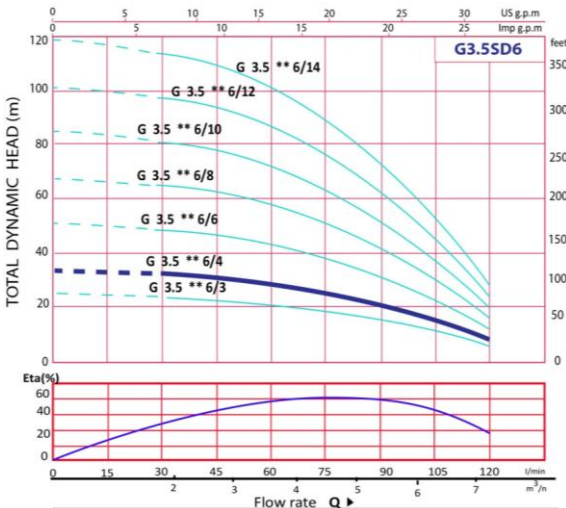


Gol Pumps Technology		DATA SHEET		Gol Pumps Technology INC 3750 NW 114 Ave No: 6zip : 33178 Miami FL. USA Tel: +1 (786) 615 - 8984 & (786)452-9775 * Fax: +1*(786) 615-7043 Email : info@golpumps.com * www.golpumps.com * www.golpumps.us		
		Thin Submersible Pump GOL PUMPS				
		3.5" Inch Pump for 4" inch well				
Pump Data						
Brand : GOL PUMPS Model : G3.5 SD - M 6/4 Flow Rate: 20 GPM Head Rate: 76 FEET Head Max: 113 FEET Flow Max: 32 GPM RPM : 3450 rpm Normal Power P2 : 0.75 HP Fluid: Water Fluid Temperature: at about 25 °C. Density: water 1.0 kg/Dm³ Fluid Viscosity: 8.90 × 10-4 Pa-s With Float switch: NONE Kind of Workiny: Submersible Delivery size: 1 1/2" NPT Suction size: With Strainer Made in : CHINA						
Motor Data						
Power P2: 0.55 KW Power P1: * Phase (PH): 1 Rate Voltage : 220 V Capacitor Need : 25/450 Ferequency : 60 Hz Rated Speed (rpm): 3450 rpm Current (A): 4.2 A Cos φ : 0.93 Degree of Protection (IP): IP 68 Safety Protection Included: F length of Cable : 2 M Kind of Plug : NONE Ambient Temp : 40°C = 104°F						
Other Pump Data						
Impeller Size (mm) : * Pressuer Rating : PN 16 Min. Fluid Temp : 10°C = 50°F Max. Fluid Temp : 35°C = 95°F Ambient Temp : 40°C = 104°F Humidity % : 100%						
Special Specification						
Installation status : Vertical Variable frequency : NONE Solid Passage : 0.25%						
Materials			Weight : 8.6 Kg Standard Approve CE 			
Pump Body : AISI 304 SS Support: AISI 304 SS Impeller: Plastic POM Mechanical Seal: Graphite\Ceramic Rubber: NBR Pump Shaft: AISI 304 SS Strainer: AISI 304 SS outer cover: Cast Iron Motor Case: AISI 304 SS						
Shaft Seal			Applicant: For Water Supply from Wells or Reservoirs for Domestic Use for Civil and Industrial Applications for Garden Use and Irrigation		Dimention in	
Type: * Stationary Part Ceramic Rotating Part Graphite Elastomer NBR					mm P 325 M 338 T 663 DN 1 1/2" D1 85 D2 84	
Pump and Motor specification optional						
With Booster System None						
With Complack None						
Special Material None						
Specail Voltage None						
Protection system required						
External Flout switch NONE						
Minimum Starter Over Load and Capacitor Box Include						