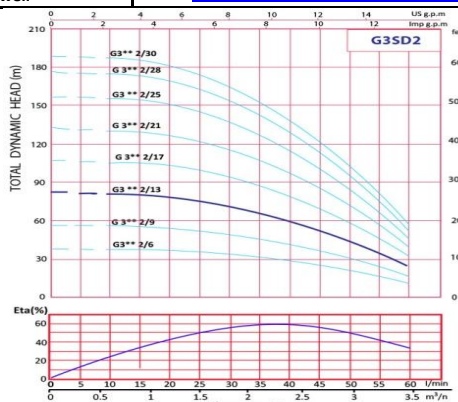



Gol Pumps T h ecnology	DATA SHEET		Gol Pumps Technology INC		
	Thin Submersible Pump GOL PUMPS		3750 NW 114 Ave No: 6zip : 33178 Miami FL. USA		
	3" Inch Pump for 3.5" inch well		Tel: +1 (786) 615 - 8984 & (786)452-9775 * Fax: +1*(786) 615-7043		
			Email : info@golpumps.com * www.golpumps.com * www.golpumps.us		
Pump Data Brand : GOL PUMPS Model : G3SD - M 2/13 Flow Rate: 5 GPM Head Rate: 250 FEET Head Max: 275 FEET Flow Max: 13 GPM RPM : 3450 rpm Normal Power P2 : 0.75 HP Fluid: Water Fluid Temperature: at about 25 °C. Density: water 1.0 kg/Dm³ Fluid Viscosity: 8.90 × 10-4 Pa-s With Float switch: NONE Kind of Workiny: Submersible Delivery size: 1 1/4" NPT Suction size: With Strainer Made in : CHINA					
Motor Data Power P2: 0.55 KW Power P1: * Phase (PH): 1 Rate Voltage : 110 V Capacitor Need : 50/250 Ferequency : 60 Hz Rated Speed (rpm): 3450 rpm Current (A): 9.6 A Cos φ : 0.95 Degree of Protection (IP): IP 68 Safety Protection Included: F length of Cable : 2 M Kind of Plug : NONE Ambient Temp : 40°C = 104°F					
Other Pump Data Impeller Size (mm) : * Pressuer Rating : PN 16 Min. Fluid Temp : 10°C = 50°F Max. Fluid Temp : 35°C = 95°F Ambient Temp : 40°C = 104°F Humidity % : 100%					
Special Specification Installation status : Vertical Variable frequency : NONE Solid Passage : 0.25%					
Materials Pump Body : AISI 304 SS Support: AISI 304 SS Impeller: Plastic POM Mechanical Seal: Graphite\Ceramic Rubber: NBR Pump Shaft: AISI 304 SS Strainer: AISI 304 SS outer cover: Cast Iron Motor Case: AISI 304 SS					
Shaft Seal Type: *			Weight : 8.6 Kg		Applicant:
Stationary Part: Ceramic Rotating Part: Graphite Elastomer: NBR			Standard Approve		
Pump and Motor specification optional With Booster System: None With Complack: None Special Material: None Specail Voltage: None			CE 	For Water Supply from Wells or Reservoirs for Domestic Use for Civil and Industrial Applications for Garden Use and Irrigation	Dimention in mm P 410 M 368 T 778 DN 1 1/4" D1 75 D2 73
Protection system required External Flout switch: NONE Minimum Starter: Over Load and Capacitor Box Include					