Trusted. Tested. Tough.®

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

ZOELLER® PUMP COMPANY

SECTION: 2.15.034
FM2897
0720
Supersedes
0317

TECHNICAL DATA SHEET
MODEL 73 SUBMERSIBLE DEWATERING PUMP

PRODUCT SPECIFICATIONS

MOTOR	Horse Power	1/3
	Voltage	115
	Phase	1 Ph
	Hertz	60 Hz
	RPM	3450
	Type	Permanent split capacitor
	Insulation	Class B
	Amps	5.5
PUMP	Operation	Automatic or nonautomatic
	Auto On/Off Points	6-1/2″ (16.5 cm)/2-1/2″ (6.3 cm)
	Discharge Size	1-1/2″ NPT
	Solids Handling	3/8″ (9 mm) spherical solids
	Cord Length	9′ (2.7 m) stardard, 20' (6 m) available
	Cord Type	UL listed with 3 prong plug
	Max. Head	18′ (5.5 m)
	Max. Flow Rate	38 GPM (144 LPM)
	Max. Operating Temp.	104 °F (40 °C)
	Cooling	Oil filled
	Motor Protection	Auto reset thermal overload
MATERIALS	Motor Housing	Cast iron
	Pump Housing	Engineered plastic
	Base	Engineered plastic
	Upper Bearing	Ball bearing
	Lower Bearing	Ball bearing
	Mechanical Seals	Carbon and ceramic
	Impeller Type	Non-clogging vortex
	Impeller	Engineered plastic
	Hardware	Stainless steel
	Motor Shaft	410 stainless steel
	Gasket	NBR

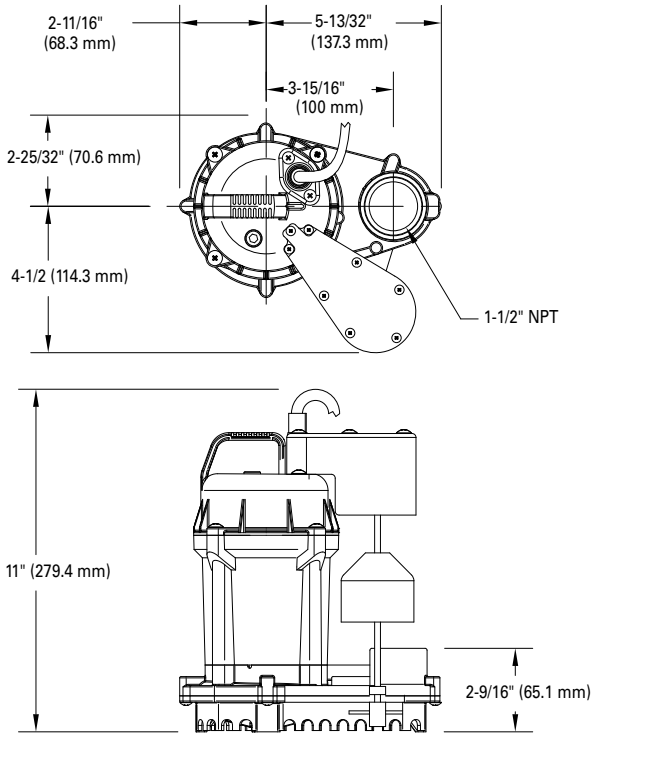

SK3021

ENERGY SAVING PRODUCT™

NOTE: See model comparison chart for specific details.

C SP US
Certified to CSA
Standard 227875

SSPMA

© Copyright 2020 Zoeller® Co. All rights reserved.
502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com

TOTAL DYNAMIC HEAD
FLOW PER MINUTE

MODEL		73	
Feet	Meters	Gal.	Liters
5	1.5	38	144
10	3.0	30	114
15	4.6	14	53
Shut-off Head:		18 ft. (5.5 m)	

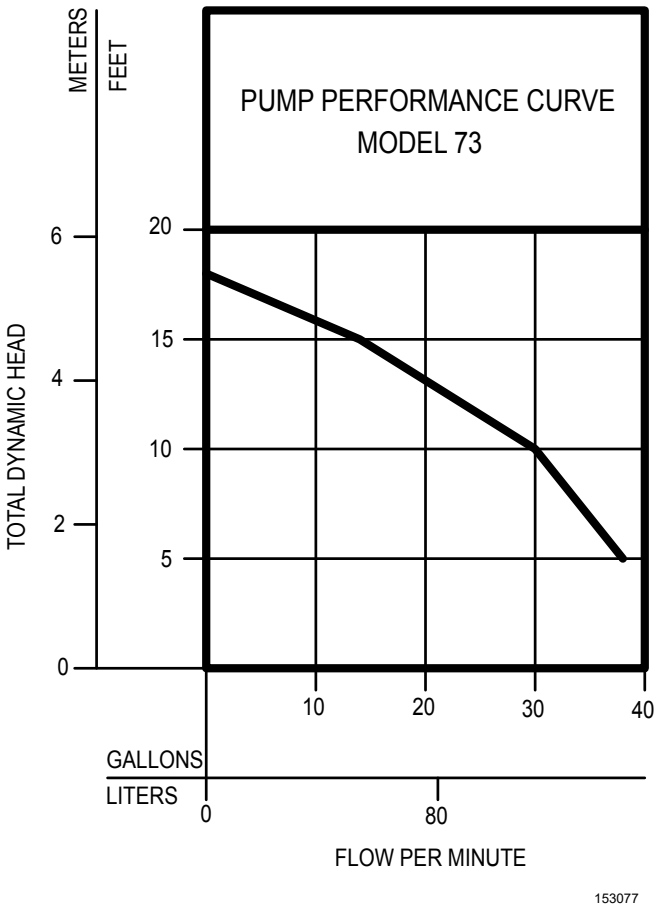

Model	MODEL COMPARISON								
	Seal	Mode	Volts	Ph	Amps	HP	Hz	Lbs	Kg
M73	Single	Auto	115	1	5.5	1/3	60	12.5	5.6
N73	Single	Non auto	115	1	5.5	1/3	60	12.0	5.4
BN73*	Single	Auto	115	1	5.5	1/3	60	13.5	6.1

* Single piggyback switch included.

⚠ CAUTION All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

© Copyright 2020 Zoeller® Co. All rights reserved.
502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com